

Top Running Trolley

5 TON CAPACITY

PRODUCT INFORMATION

DWG. NO:



NOR4013-1426

DATE: 11/11/2016

REVISION: 0

TYPE: 26

4 PART DOUBLE REEVING

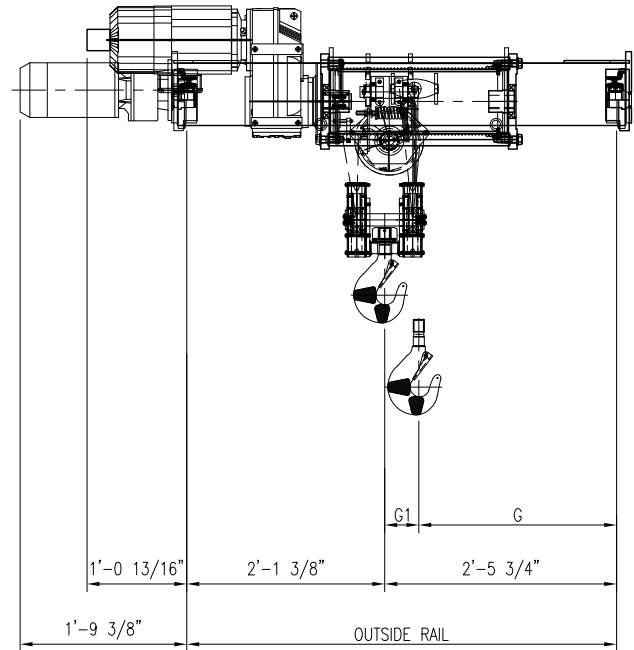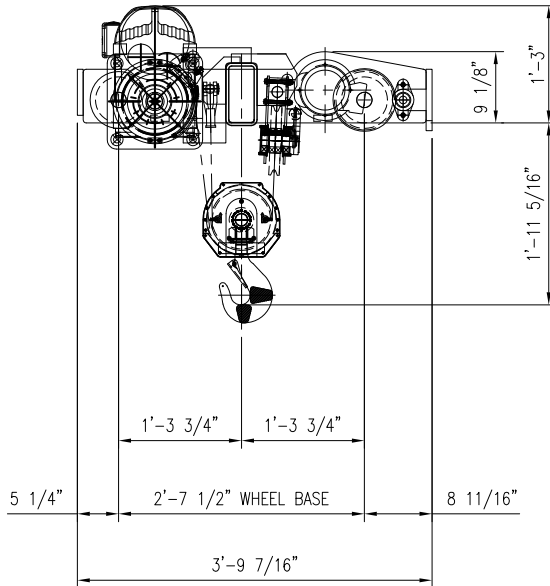

WIRE ROPE 5/16" DIA. 6 x 36 SKZ8

ACECO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY	15 Tons (30,000 lbs.)	TROLLEY SPEED	MOTOR DATA	Optional: Hoisting Speed, Trolley Speed, Lift, Power Supply, etc.; Consult Factory. DRUM DIA. 7.637" WHEEL DIA. 5.906"
CLASS	CMAA CLASS "D"	60 FPM	.5 HP / 1800 RPM	
POWER SUPPLY	460V-3PH-60HZ	70 FPM		
		90 FPM		

DIMENSIONAL INFORMATION

HOIST	HEIGHT OF LIFT	OUTSIDE	G	G1	WEIGHT	HOIST	HOIST MOTOR	SPEED
TYPE	FEET	RAIL			LBS.	SIZE	HP/RPM	VARIABLE
NOR4013-1426	23	4' - 7"	2' - 1"	4	1,500	1	TEFC, S3 - 40% CLASS F INSULATION	FPM
NOR4013-2426	33	4' - 7"	2' - 1"	6	1,600	2	5 / 1800	18 / 3
NOR4013-3426	41	5' - 0"	2' - 1"	7	1,700	3		