


Double Loop Chain



- Meets or exceeds ASTM & NACM standards where applicable
- Available in various finishes
- Sold by carton, reel or pails
- Custom cuts for OEM applications are available

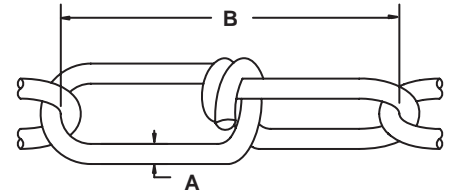


Double Loop typical uses include; suspension of lighting, animal leashes, swings & hammocks

| Trade Size | Working Load Limit | Product Code Self Colored | Product Code Zinc Plated | Quantity Per Carton | A | B | App. Weight | App. No. of Links |
|-----------------|--------------------|---------------------------|--------------------------|---------------------|-------|-------|-------------|-------------------|
| Imperial | | | | | | | | |
| | lb. | | | ft. | in. | in. | lb. / ft. | per ft. |
| #5 | 55 | 680150 | 680450 | 100 | 0.062 | 0.920 | 0.04 | 13 |
| #4 | 70 | 680151 | 680451 | 100 | 0.072 | 1.000 | 0.05 | 12 |
| #3 | 90 | 680152 | 680452 | 100 | 0.080 | 1.100 | 0.06 | 11 |
| #2 | 115 | 680153 | 680453 | 100 | 0.091 | 1.330 | 0.08 | 9 |
| #1 | 155 | 680154 | 680454 | 100 | 0.105 | 1.540 | 0.10 | 8 |
| 1/0 | 200 | 680155 | 680455 | 100 | 0.120 | 1.780 | 0.13 | 7 |
| 2/0 | 255 | 680156 | 680456 | 100 | 0.135 | 1.820 | 0.17 | 7 |
| 3/0 | 305 | 680157 | 680457 | 100 | 0.148 | 2.170 | 0.20 | 5.5 |
| 4/0 | 365 | 680158 | 680458 | 100 | 0.162 | 2.190 | 0.25 | 5.5 |

Single Loop Chain



- Meets or exceeds ASTM & NACM standards where applicable
- Available in various finishes
- Sold by carton, reel or pails
- Custom cuts for OEM applications are available

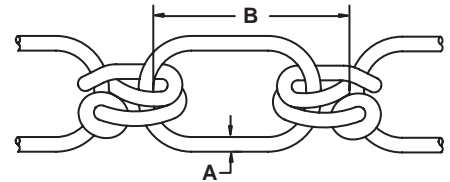


Single Loop typical uses include; overhead door applications, ventilators, operating valve wheels, sprocket wheels requiring more strength than double loop chain

| Trade Size | Working Load Limit | Product Code Self Colored | Product Code Zinc Plated | Quantity Per Carton | A | B | App. Weight | App. No. of Links |
|-----------------|--------------------|---------------------------|--------------------------|---------------------|-------|-------|-------------|-------------------|
| Imperial | | | | | | | | |
| | lb. | | | ft. | in. | in. | lb. / ft. | per ft. |
| 1/0 | 265 | 681151 | 681451 | 100 | 0.120 | 1.290 | 0.17 | 9.3 |
| 2/0 | 340 | 681152 | 681452 | 100 | 0.135 | 1.480 | 0.22 | 8.1 |
| 3/0 | 405 | 681153 | 681453 | 75 | 0.148 | 1.630 | 0.26 | 7.4 |
| 4/0 | 485 | 681154 | 681454 | 100 | 0.162 | 1.800 | 0.31 | 6.7 |

Special Well Chain



- Meets or exceeds ASTM & NACM standards where applicable
- Available in various finishes
- Sold by carton, reel or pails
- Custom cuts for OEM applications are available

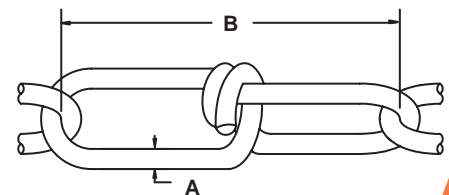

Special well chain typically used in cisterns

| Trade Size | Working Load Limit | Product Code | Quantity Per Carton | A | B | App. Weight | App. No. of Links |
|-----------------|--------------------|--------------|---------------------|-------|-------|-------------|-------------------|
| Imperial | | | | | | | |
| | lb. | | ft. | in. | in. | lb. / ft. | per ft. |
| 2/0 | 255 | 679456 | 100 | 0.135 | 2.500 | 0.15 | 4.8 |