



Hook Suspension Trolleys

For more information contact:
American Crane & Equipment Corp.
Authorized Distributor
Tel: 877-503-2972
Fax: 484-945-0430
sales@americancrane.com
www.americancrane.com

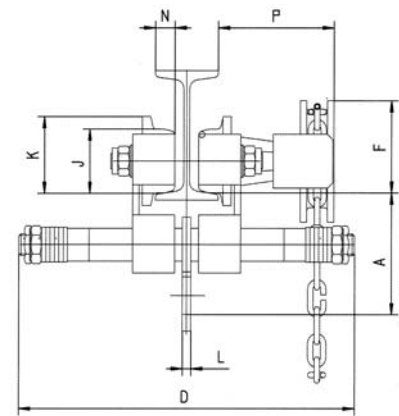

- Capacities from 1/4 to 5 ton (metric rated).
- Trolley sides are of all-steel construction for maximum strength
- Wheels are steel with hardened treads and roller bearings for easy traversing and long life
- Self aligning frames keep the load equally distributed, and are adjustable to fit several sizes of beams
- Wrap-around side plates provide built in drop stops to increase operator safety and act as a bumper to protect wheels
- Push trolleys are an economical alternative for low duty cycle, lighter capacity applications with lifts under 20 feet
- Hand geared trolleys are designed for applications requiring close control of horizontal movement of the hoist and its load
- Hand geared trolleys are deal for those applications where an operator shouldn't be near or touch the load to move or position it

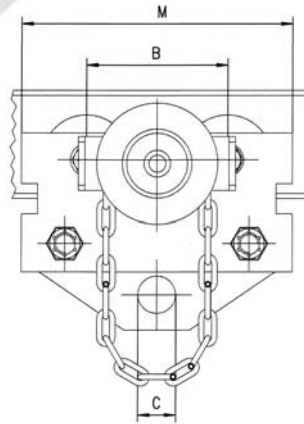

Specifications & Dimensions

Capacity*	Model # **	Standard Beam Height	I-Beam Width	Min. Radius Curve	Wheel Tread Diameter	(CBTG)							(CBTG)				Net Weight	
						A	B	C	D	F	J	K	K	L	M	N		P
tons		in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in
Push Trolley																		
1/4	CBTP-0025	4 to 24	2.0 to 8.7	27	2.36	3.94	3.54	1.18	11.81	-	2.36	2.83	-	0.31	7.56	0.71	-	19
1/2	CBTP-0050	4 to 24	2.0 to 8.7	27	2.36	3.94	3.54	1.18	11.81	-	2.36	2.83	-	0.31	7.56	0.71	-	19
1	CBTP(G)-0100	5 to 24	2.3 to 8.7	36	2.36	4.33	5.12	1.38	12.20	3.60	2.36	2.83	3.03	0.31	9.84	0.71	4.33	26
1-1/2	CBTP(G)-0150	6 to 24	2.3 to 8.7	45	3.15	5.12	5.91	1.89	12.60	3.56	3.15	3.78	3.86	0.47	11.81	0.79	4.33	46
2	CBTP(G)-0200	6 to 24	2.3 to 8.7	45	3.15	5.12	5.91	1.89	12.60	3.56	3.15	3.78	3.86	0.47	11.81	0.79	4.33	46
3	CBTP(G)-0300	8 to 24	3.0 to 8.7	55	4.41	6.18	7.09	2.36	13.39	4.23	4.41	5.20	5.24	0.55	14.57	1.14	4.33	86
5	CBTP(G)-0500	10 to 24	3.5 to 8.7	70	4.92	7.09	8.23	2.76	13.78	5.89	4.92	5.63	5.87	0.79	17.32	1.26	4.33	130

* Metric rated

** When ordering specify "P" for plain trolley or "G" for geared trolley