


Hammerlok® Coupling Links

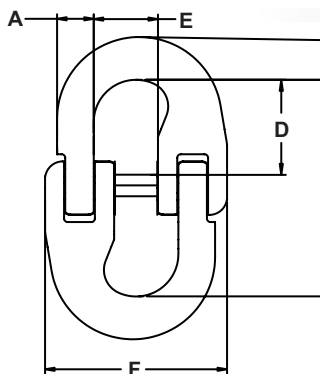


- Proven design
- Forged from Alloy Steel
- 100% proof tested
- Designed to meet ASTM A952 & EN1677

For more information contact:
 American Crane & Equipment Corp.
 Authorized Distributor
 Tel: 877-503-2972
 Fax: 484-945-0430
 sales@americancrane.com
 www.americancrane.com

Size	Working Load Limit	Product Code	Dimensions						Weight
			A Max	B max	C	D	E Min	F	
Imperial									
in.	lb.		in.	in.	in.	in.	in.	in.	lb.
9/32	4,300	667028	0.365	0.435	1.98	0.71	0.541	1.69	0.28
3/8	8,800	667038	0.502	0.591	3.00	1.16	0.910	2.50	0.84
1/2	15,000	667050	0.678	0.780	3.80	1.43	1.097	3.19	1.87
5/8	22,600	667062	0.804	0.905	4.54	1.74	1.317	3.88	3.13
3/4	35,300	667075	0.973	1.071	5.36	2.09	1.516	4.69	5.75
Metric									
mm	kg		mm	mm	mm	mm	mm	mm	kg
7	1,950	667028	9	11	50	18	14	43	0.12
10	4,000	667038	13	15	76	29	23	64	0.38
13	6,800	667050	17	20	96	36	28	81	0.85
16	10,300	667062	20	23	115	44	33	98	1.42
20	16,000	667075	25	27	136	53	39	119	2.60

Eye Foundry Hook

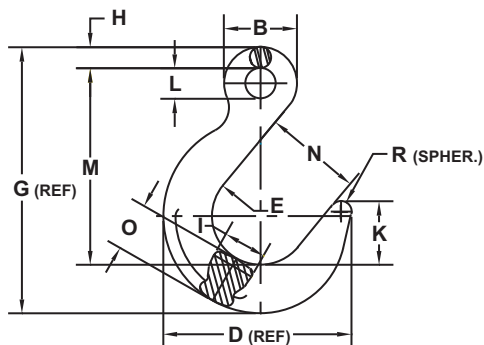


- Proven design
- Forged from Alloy Steel
- Large open throat makes attachment easy
- 100% proof tested
- Designed to meet ASTM A952 & EN1677
- For welded 7/32" chain sling use 9/32" eye hook

Size	Working Load Limit	Product Code	Dimensions												Weight
			B	D	E	G	H	I	K	L	M	N	O	R	
Imperial															
in.	lb.		in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	lb.
9/32	4,300	474798	1.56	4.75	2.50	6.45	0.47	1.00	1.56	0.63	4.75	2.50	1.23	0.25	2.4
3/8	8,800	474799	2.00	5.75	3.00	7.88	0.63	1.27	1.88	0.75	5.75	3.00	1.50	0.31	4.5
1/2	15,000	474800	2.50	6.75	3.50	9.38	0.75	1.50	2.22	1.00	6.88	3.50	1.75	0.38	7.1
5/8	22,600	474801	3.00	7.81	4.00	10.97	0.88	1.81	2.63	1.13	8.06	4.00	2.03	0.44	11.6
3/4	35,300	474802	3.50	9.13	4.50	12.81	1.00	2.20	3.00	1.50	9.25	4.50	2.56	0.50	20.0
Metric															
mm	kg		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
7	1,950	474798	40	121	64	164	12	25	40	16	121	64	31	6	1.09
10	4,000	474799	51	146	76	200	16	32	48	19	146	76	38	8	2.04
13	6,800	474800	64	171	89	238	19	38	56	25	175	89	44	10	3.22
16	10,300	474801	76	198	102	279	22	46	67	29	205	102	52	11	5.25
20	16,000	474802	89	232	114	325	25	56	76	38	235	114	65	13	9.06

! WARNING !

Do not exceed working load limit


- New streamlined design
- Forged from Alloy Steel
- Improved cast steel latch
- 100% proof tested
- Designed to meet ASTM A952 & EN1677

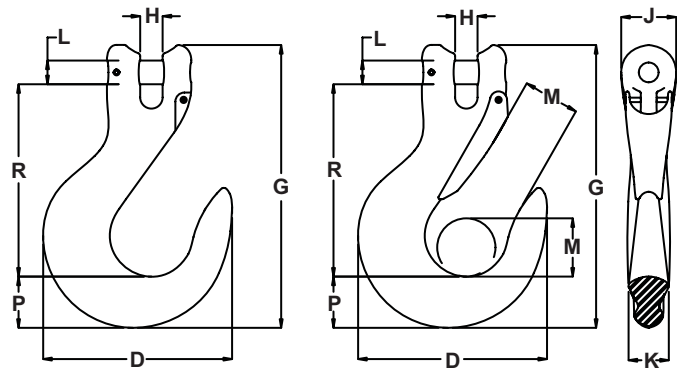

Size	Working Load Limit	Product Code w/ latch	Product Code w/o latch	Latch Kit	Dimensions									Weight
					D	G	H	J	K	L	M	P	R	
Imperial														
in.	lb.				in.	in.	in.	in.	in.	in.	in.	in.	in.	lb.
9/32	4,300	658718	658738	658718	3.53	5.22	.35	1.00	.75	.36	1.09	.94	3.56	1.40
3/8	8,800	658719	658739	658719	4.34	6.56	.47	1.16	.95	.51	1.25	1.21	4.46	2.57
1/2	15,000	658720	658740	658720	5.12	7.72	.59	1.50	1.10	.63	1.69	1.35	5.24	4.08
5/8	22,600	658721	658741	658721	5.98	8.96	.71	1.74	1.27	.75	1.88	1.56	6.07	6.37
Metric														
mm	kg				mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
7	1,950	658718	658738	658718	89.6	132.7	8.9	25.4	19	9.1	27.7	24	90.5	0.64
10	4,000	658719	658739	658719	110.3	166.5	11.9	29.5	24.1	12.9	31.8	30.7	113.4	1.16
13	6,800	658720	658740	658720	130	196.0	15	38.1	27.9	15.9	42.9	34.3	133	1.85
16	10,300	658721	658741	658721	151.9	227.5	18	43.4	32.3	19	47.8	39.7	154.2	2.89


Eye Sling Hook

- New streamlined design
- Forged from Alloy Steel
- 100% proof tested
- Designed to meet ASTM A952 & EN1677
- For welded 7/32" chain sling use 9/32" eye hook

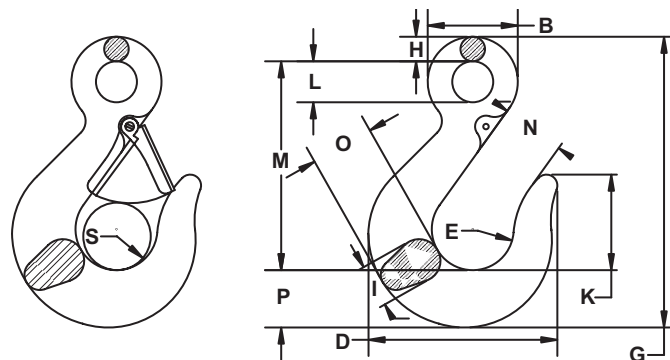

Size	Working Load Limit	Product Code w/ latch	Product Code w/o latch	Latch Kit	Dimensions													Weight
					B	D	E	G	H	I	K	L	M	N	O	P	S	
Imperial																		
in.	lb.				in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	lb.
9/32	4,300	558622	458622	595523	1.63	3.50	1.50	5.25	.44	.73	1.59	.75	3.75	1.19	1.20	1.05	1.06	1.1
3/8	8,800	558625	458625	595525	2.06	4.33	1.88	6.64	.56	.95	2.19	.94	4.78	1.44	1.45	1.28	1.31	1.9
1/2	15,000	558628	458628	595528	2.63	5.50	2.25	8.16	.75	1.17	2.56	1.13	5.69	1.78	1.94	1.66	1.63	4.5
5/8	22,600	558629	458629	595529	3.06	6.34	2.63	9.66	.88	1.44	2.63	1.31	6.50	2.03	2.38	2.19	1.75	7.3
3/4	35,300	558630	458630	595530	3.50	7.83	3.00	11.38	1.00	1.69	3.44	1.50	7.81	2.50	2.83	2.51	2.19	11.4
Metric																		
mm	kg				mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
7	1,950	558622	458622	595523	41	89	38	133	11	19	40	19	95	30	31	27	27	.50
10	4,000	558625	458625	595525	52	110	48	169	14	24	56	24	121	37	37	33	33	.90
13	6,800	558628	458628	595528	67	140	57	207	19	30	65	29	145	45	49	42	41	2.04
16	10,300	558629	458629	595529	78	161	67	245	22	37	67	33	165	52	60	56	45	3.31
20	16,000	558630	458630	595530	89	199	76	289	25	43	87	38	198	64	72	64	56	5.17


Clevlok Cradle Grab Hook

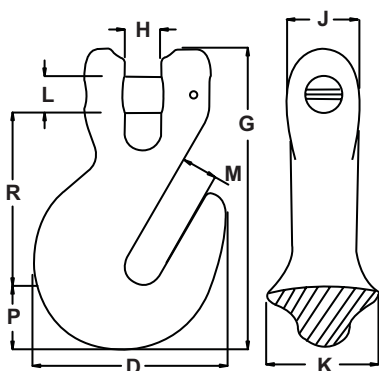

- New streamlined design
- Forged from Alloy Steel
- 100% proof tested
- Designed to meet ASTM A952 & EN1677

Size	Working Load Limit	Product Code	Dimensions									Weight
			D	G	H	J	K	L	M	P	R	
Imperial												
in.	lb.		in.	in.	in.	in.	in.	in.	in.	in.	in.	lb.
9/32	4,300	659722	2.18	3.38	.38	.80	.95	.36	.38	.82	1.86	.63
3/8	8,800	659725	2.72	4.33	.47	1.16	1.27	.51	.47	1.02	2.47	1.30
1/2	15,000	659728	3.32	5.27	.65	1.24	1.54	.63	.65	1.18	3.05	2.10
5/8	22,600	659729	4.18	6.54	.79	1.53	1.92	.75	.79	1.41	3.75	4.20
Metric												
mm	kg		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
7	1,950	659722	55.3	85.9	9.6	20.2	24.1	9.1	9.6	20.8	47.2	0.29
10	4,000	659725	69.1	110.1	11.9	29.5	32.3	12.9	11.9	25.9	62.7	0.59
13	6,800	659728	84.4	133.7	16.5	31.4	39.1	15.9	16.5	29.9	77.4	0.95
16	10,300	659729	106.1	166.2	24.6	38.8	48.8	19	24.6	35.8	95.3	1.90

Eye Cradle Grab Hook

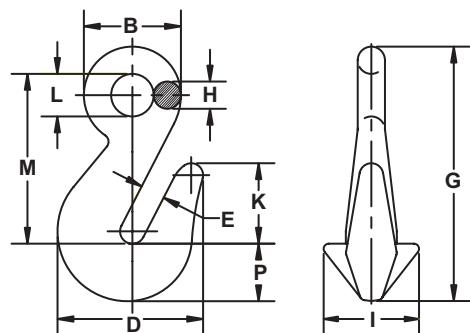

- New streamlined design
- Forged from Alloy Steel
- 100% proof tested
- Designed to meet ASTM A952 & EN1677
- For welded 7/32" chain sling use 9/32" eye hook


Size	Working Load Limit	Product Code	Dimensions										Weight
			B	D	E	G	H	I	K	L	M	P	
Imperial													
in.	lb.		in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	lb.
9/32	4,300	559725	1.38	1.91	0.36	3.70	.38	1.06	1.04	0.63	2.57	0.76	0.55
3/8	8,800	559737	1.78	2.78	0.47	4.81	.50	1.38	1.49	0.78	3.28	1.04	1.39
1/2	15,000	559750	2.28	3.63	0.59	6.19	.63	1.81	1.98	1.03	4.22	1.51	3.05
5/8	22,600	559762	2.75	4.41	0.75	7.62	.75	2.13	2.39	1.25	5.06	1.80	4.36
3/4	35,300	559775	3.19	5.23	0.88	8.99	0.88	2.88	3.50	1.44	6.25	1.88	9.00
Metric													
mm	kg		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
7	1,950	559725	35	49	9	94	10	27	26	16	65	19	0.20
10	4,000	559737	45	71	12	122	13	35	38	20	83	26	0.60
13	6,800	559750	58	92	15	157	16	46	50	26	107	38	1.40
16	10,300	559762	70	112	19	193	19	54	61	32	129	46	2.00
20	16,000	559775	81	133	22	228	22	73	89	37	159	48	4.08

! WARNING !

Do not exceed working load limit

CM Clevlok Lodelok Hook


- Will fit grade 80 or grade 100
- Open design permits multi hardware use (Chain, Nylon & Wire Rope)
- Interlocking tip gives added protection
- Forged from Alloy Steel
- New “I” beam no catch point design
- 100% proof tested
- Designed to meet ASTM A952 & EN1677

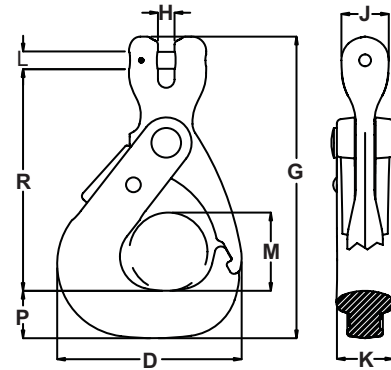

Size	Working Load Limit	Product Code	Replace Latch Kit Part #	Dimensions									Weight
				D	G	H	J	K	L	M	P	R	
Imperial													
in.	lb.			in.	in.	in.	in.	in.	in.	in.	in.	in.	lb.
9/32	4,300	616005	656005	3.89	6.37	.35	1.00	1.19	.36	1.56	1.00	4.68	2.62
3/8	8,800	616010	656010	5.03	8.20	.47	1.16	1.25	.51	2.25	1.25	6.11	4.93
1/2	15,000	616015	656015	6.68	10.07	.59	1.50	1.63	.63	2.81	1.75	7.25	9.32
5/8	22,600	616020	656020	8.04	11.62	.71	1.74	1.88	.75	3.19	2.00	8.36	14.70
Metric													
mm	kg			mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
7	1,950	616005	656005	98.9	161.7	8.9	25.4	30.2	9.1	39.7	25.4	118.8	1.19
10	4,000	616010	656010	127.8	208.4	11.9	29.5	31.8	12.9	57.2	31.8	155.2	2.24
13	6,800	616015	656015	169.7	255.9	15	38.1	41.3	15.9	71.4	44.4	184	4.23
16	10,300	616020	656020	204.2	295.2	18	43.4	47.6	19	81	50.8	212.4	6.67


Eye Lodelok Hook

- Open design permits multi hardware use (Chain, Nylon & Wire Rope)
- Interlocking tip gives added protection
- Forged from Alloy Steel
- New “I” beam no catch point design
- 100% proof tested
- Designed to meet ASTM A952 & EN1677
- For welded 7/32” chain sling use 9/32” eye hook

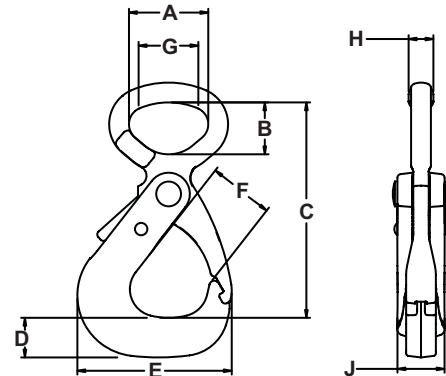

Size	Working Load Limit	Product Code	Replace Latch Kit Part #	Dimensions									Weight
				A	B	C	D	E	Fmin	G	H	J	
Imperial													
in.	lb.			in.	in.	in.	in.	in.	in.	in.	in.	in.	lb.
9/32	4,300	626005	656005	2.00	1.31	5.43	1.00	3.89	1.563	1.47	0.63	1.19	2.64
3/8	8,800	626010	656010	2.50	1.78	7.41	1.25	5.03	2.250	2.00	0.75	1.25	4.86
1/2	15,000	626015	656015	3.44	2.38	9.38	1.75	6.68	2.813	2.59	1.00	1.63	10.46
5/8	22,600	626020	656020	3.94	2.62	10.71	2.00	8.04	3.125	2.92	1.25	1.88	16.52
Metric													
mm	kg			mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
7	1,950	626005	656005	51	33	138	25	99	40	37	16	30	1.19
10	4,000	626010	656010	64	45	188	32	128	57	51	19	32	2.20
13	6,800	626015	656015	87	60	238	44	170	71	66	25	41	4.74
16	10,300	626020	656020	100	67	272	51	204	79	74	32	48	7.48

Swivel Lodelok Hook

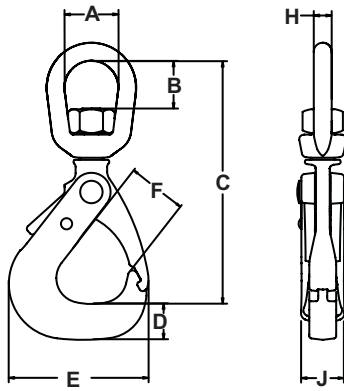



- Permits positioning of load before lift
- Open design permits multi hardware use (Chain, Nylon & Wire Rope)
- Interlocking tip gives added protection
- Forged from Alloy Steel
- New “I” beam no catch point design
- 100% proof tested
- Designed to meet ASTM A952 & EN1677
- For welded 7/32” chain sling use 9/32” eye hook

Size	Working Load Limit	Product Code	Replace Latch Kit Part #	Dimensions								Weight
				A	B	C	D	E	F min	G	H	
Imperial												
in.	lb.			in.	in.	in.	in.	in.	in.	in.	in.	lb.
9/32	4,300	676005	656005	1.50	1.33	6.79	1.00	3.89	1.563	1.19	0.50	2.61
3/8	8,800	676010	656010	1.75	1.63	8.77	1.25	5.03	2.250	1.25	0.63	5.09
1/2	15,000	676015	656015	2.00	1.76	10.54	1.75	6.68	2.813	1.63	0.75	11.03
5/8	22,600	676020	656020	2.75	2.38	12.80	2.00	8.04	3.125	1.88	1.00	18.09
Metric												
mm	kg			mm		mm	mm	mm	mm	mm	mm	kg
7	1,950	676005	656005	38	34	172	25	99	40	30	13	1.64
10	4,000	676010	656010	44	41	223	32	128	57	32	16	2.31
13	6,800	676015	656015	51	45	268	44	170	71	41	19	5.00
16	10,300	676020	656020	70	60	325	51	204	79	48	25	8.19

Identification/Serial Number Tag

Product Code
557037

For more information contact:
American Crane & Equipment Corp.
Authorized Distributor
Tel: 877-503-2972
Fax: 484-945-0430
sales@americancrane.com
www.americancrane.com

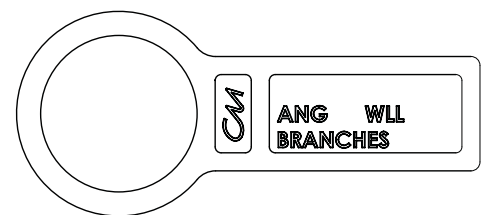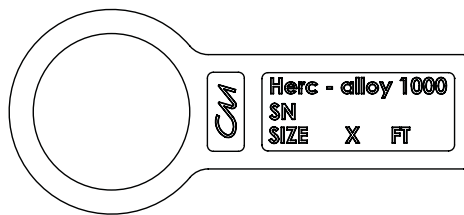

Columbus McKinnon Corporation, Amherst, NY, guarantees each new chain and forged product of its manufacture under normal use and service to be free from defects in material and workmanship. Our obligation, under this guarantee is limited to making good at our factory this product or any portion thereof, which within one year from the date of sale have been returned to us and which on our examination shall disclose such defects. This guarantee shall be null and void if any repairs, annealing, plating, or heat treatment of Chain or forged products has been made at any plant other than authorized by Columbus McKinnon Corporation.

This guarantee is expressly in lieu of all other warranties expressed or implied and of all other obligations or liabilities on our part, and we neither assume nor authorize any other person to assume for us any liability in connection with the sale or use of chain and forged products.