

Top Running Trolley

20 TON CAPACITY

PRODUCT INFORMATION

DWG. NO:



NOR20b26

DATE: 07/27/2016

REVISION: 1

TYPE: 26

4 PART SINGLE REEVING

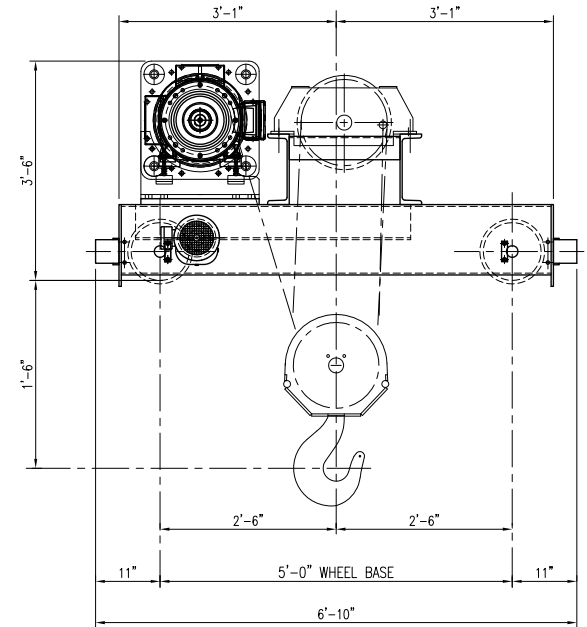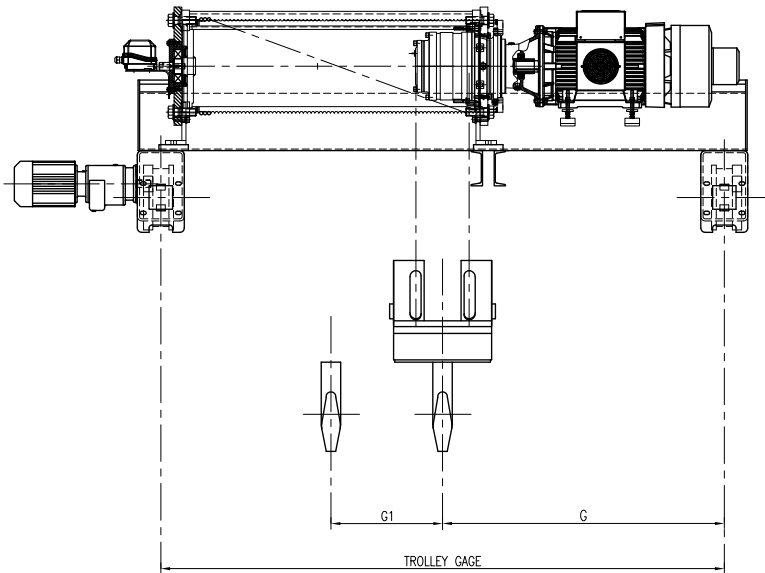

WIRE ROPE $\frac{3}{4}$ " 6 x 36 IWRC

ACECO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.

HOIST TECHNICAL DATA

CLASS	CMAA CLASS "D"	TROLLEY SPEED	MOTOR DATA	Optional: Hoisting Speed, Trolley Speed, Lift, etc.; consult factory. DRUM DIA. 24" WHEEL DIA. 10"
POWER SUPPLY	460V-3PH-60HZ	60 F.P.M.	X HP / 1800 RPM	
		70 F.P.M.	X HP / 1800 RPM	
		90 F.P.M.	X HP / 1800 RPM	

DIMENSIONAL INFORMATION

HOIST	HEIGHT OF LIFT	TROLLEY	G	G1	WEIGHT	HOIST MOTOR	SPEED	SPEED
SIZE	FEET	GAGE			LBS.	HP/RPM	VARIABLE	SWIFT LIFT
3'	112	8' - 0"	35"	14"	9,500	TEFC, S3 - 40% CLASS F INSULATION	FPM	FPM
4'	134	10' - 6"	50"	17"	10,000	30 / 1800	19	24