

Top Running Trolley

25 TON CAPACITY

PRODUCT INFORMATION

DWG. NO:



NOR25m18

DATE: 08/09/2016

REVISION: 1

TYPE: 18

4 PART DOUBLE REEVING

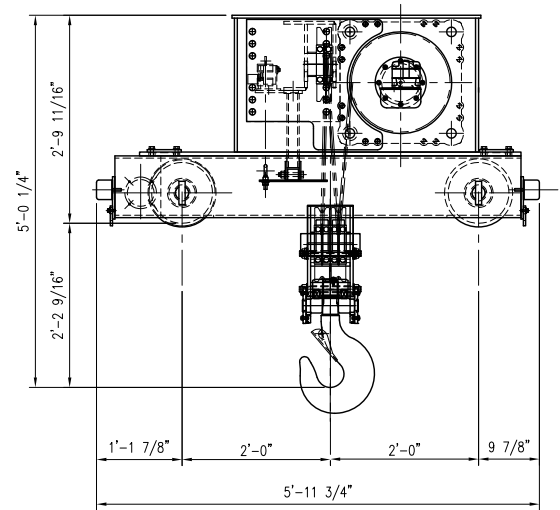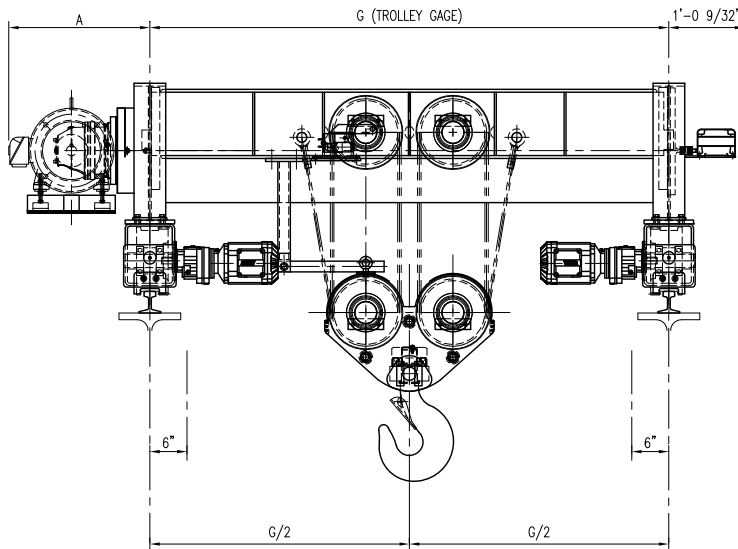

WIRE ROPE $\phi 9/16"$ 6 x 36 IWRC EIP

ACECO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY	25 Tons (50,000 lbs.)	TROLLEY SPEED	MOTOR DATA	Optional: Hoisting Speed, Trolley Speed, Lift, Power Supply, etc.; consult factory. DRUM DIA. 16" WHEEL DIA. 10"
CLASS	CMAA CLASS "D"	60 F.P.M.	1.5 HP / 1800 RPM	
POWER SUPPLY	460V-3PH-60HZ	70 F.P.M.	2 HP / 1800 RPM	
		90 F.P.M.	3 HP / 1800 RPM	

DIMENSIONAL INFORMATION

G	LIFT	WEIGHT	HOIST	HOIST	MOTOR	SPEED	CLASS "D"	"A"
(GAGE)	FEET	LBS.	SIZE	HP/RPM	FPM	SWIFT LIFT		
						FPM		
4' - 0"	26	5,688	4					
5' - 0"	35	5,908	5					
6' - 0"	45	6,129	6					
7' - 0"	55	6,349	7					
8' - 0"	64	6,570	8					
9' - 0"	74	7,011	9					
10' - 0"	86	7,893	10					