


Wire Rope Attachments

Swaging Sleeve for Flemish Eye



- Carbon steel sleeves come with unique color change quality control feature- color changes intensity once sleeve has been pressed verifying that swaging has occurred
- Zinc plating extends shelf life and resists rusting
- Color coding helps determine size and simplifies inventory
- Seamless construction
- Fits standard industry dies
- Mill certified, annealed low carbon steel provides consistent swaging without cracking
- No need for 16th size dies - O.D. of 16th sizes same as next largest sleeve size

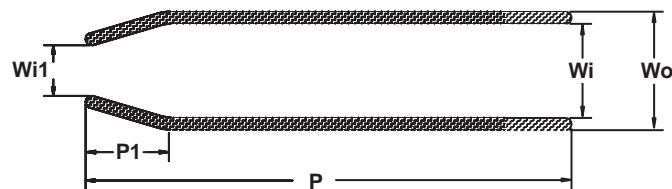

Rope Diameter	Product Code	Dimensions					Wall Thickness	Diameter After Swage	Weight
		P	Wo	Wi1	Wi	P1			
Imperial									
in.		in.	in.	in.	in.	in.	in.	in.	lb.
0.250	697180	1.000	0.656	0.328	0.468	0.281	0.093	0.500	0.04
0.312	697181	1.500	0.906	0.438	0.609	0.468	0.141	0.730	0.14
0.375	697182	1.500	0.906	0.468	0.656	0.468	0.125	0.730	0.12
0.468	697183	2.000	1.218	0.562	0.844	0.594	0.98	0.980	0.32
0.500	697184	2.000	1.218	0.625	0.906	0.594	0.156	0.980	0.28
0.562	697185	2.750	1.468	0.688	1.031	0.703	0.218	1.200	0.63
0.625	697186	2.750	1.468	0.750	1.094	0.703	0.188	1.200	0.56
0.750	697187	3.188	1.7188	0.922	1.281	0.859	0.218	1.410	0.88
0.875	697188	3.562	2.013	1.013	1.531	1.000	0.250	1.630	1.38
1.00	697189	4.000	2.281	1.156	1.719	1.125	0.281	1.880	1.90
1.125	697190	4.813	2.500	1.281	1.938	1.250	0.281	2.080	2.60
1.250	697191	5.203	2.781	1.468	2.156	1.406	0.312	2.270	3.40
1.375	697192	5.813	3.000	1.562	2.375	1.562	0.312	2.460	4.30
1.500	697193	6.250	3.250	1.688	2.625	1.688	0.312	2.650	5.00
1.750	697194	7.250	3.844	1.938	3.125	1.969	0.359	3.040	8.40
2.000	697195	8.500	4.375	2.250	3.625	2.250	0.375	3.500	11.30
2.250	697196	9.563	5.031	2.500	4.031	2.531	0.500	4.060	19.20
2.500	697197	10.500	5.500	2.750	4.500	2.813	0.500	4.440	23.20